

The State of Being Safe!



6kA

BENEFITS:

- Close Overload Protection • Short Circuit Protection
- Consistent Performance • Finger Touch Proof



www.hplindia.com



Playing It Safe.



When it comes to your house, undoubtedly there is nothing more reliable than the Rakshak range of Miniature Circuit Breakers. This is not just any ordinary MCB but a marvel in the entire MCB industry. Developed by a set of expert engineers in HPL's world class R&D labs with just one sole purpose in mind—to protect you and your electrical equipments. It is designed to be the perfect defence system for your electrical equipments against overloads and short circuits. Its unique superior current limiting technology limits the flow of let through energy and helps rapid extinguish of Arc, thus ensuring the safety of wires, cables & equipments from damage.

Features

- Certified to IS/IEC 60898-1.
- Designed for mounting in any regular distribution boards.
- Easy mounting on DIN Rail.
- Sleek, light, flame retardant body.

Technical Data

- Current Rating: 6, 10, 16, 20, 25, 32, 40, 50 & 63 Amps. 1P, 1P+N, 2P, 3P, 3P+N, 4P.
- Voltage Rating: 240/415 V AC 50 Hz.
- Low watt loss hence energy saving.

Breaking Capacity

- 6kA (6000 Amps).

Tripping Characteristics

B Curve

- Protection against over current for sensitive devices.
- The Magnetic Trip unit operates between 3-5 In.
Example : Computers, Electrical equipments, etc.

C Curve


- The Magnetic Trip units operate between 5-10 In.
- Protection against over currents for inductive load applications.
Example : Air conditioners, Motor pump sets, etc.

Temperature working range

- -5°C to 55°C (with de-rating)

Connections

- Terminal Capacity: upto 25mm²

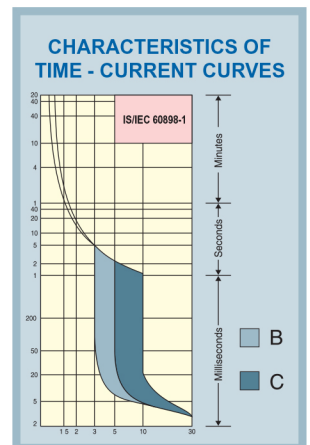

Watt Loss Chart	
Rating	Watt loss (Watts)
06 < In < 10	2W
10 < In < 16	3W
16 < In < 25	3.5W
25 < In < 32	4W
32 < In < 40	4.5W
40 < In < 63	6.5W

**ALSO AVAILABLE IN
HPL RAKSHAK RANGE
ISOLATOR UPTO 63 AMP.
WIDE RANGE AND VARIETY
OF DISTRIBUTION BOARDS
(SYSTEMS).**



HPL Electric & Power Ltd

Corp. Office: 76-B, Phase-IV, Sector-57, HSIIDC Industrial Estate,
Kundli-131028, Sonapat, Haryana INDIA.
Tel.: +91-130-350 3958, 350 3437
Registered Office: 1/20, Asaf Ali Road, New Delhi-110 002, INDIA.
E-mail: hpl@hplindia.com

Follow us:

Customer Care No.: 18004190198
E-mail: customercare@hplindia.com
For online Complaint Registration:
<https://www.hplindia.com/register-complaint.php>
www.hplindia.com